


## TD-95A8E3B

### 12MP IR Water-proof

### Fisheye Network Camera



- 1:1 (3000×3000) @30fps
- H.265+ / H.265/ H.264+/H.264/MJPEG coding
- ICR auto switch, true day & night
- 10~20m IR view distance
- Support 3D DNR, digital WDR, BLC, HLC, Smart IR, Defog, etc.
- Support ROI
- Built-in micro SD card slot, up to 256GB
- IP 67 ingress protection
- Intelligent Analytics
- Support NAT function
- Support mobile surveillance by smart phones with iOS and Android OS

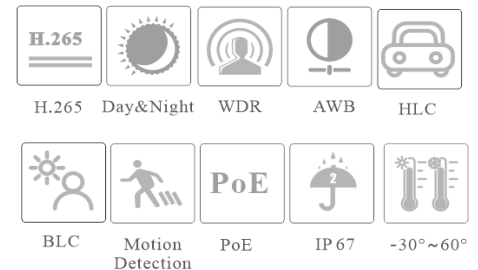

Shenzhen TVT Digital Technology Co., LTD.

Address: 23<sup>rd</sup> Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R. China

Tel: +86-755-36995888

Website: <http://en.tvt.net.cn>

Fax: +86-755-33104777

E-mail: [overseas@tvt.net.cn](mailto:overseas@tvt.net.cn)

## Specifications

Model	TD-95A8E3B
<b>Camera</b>	
Image Sensor	1/1.7" Progressive Scan CMOS
Max. Resolution	4000×3000
Electronic Shutter	1/3s ~ 1/100000s
Min. Illumination	0.01 lux@F2.0, AGC ON; 0 lux with IR
IRIS	Fixed IRIS
Lens	1.65mm @F2.0, horizontal field of view : 180° (wall mounting), 360° (ceiling mounting), 360° (desktop)
WDR	Digital WDR
S/N Ratio	≥ 50dB
BLC	Yes
HLC	Yes
Defog	Yes
Digital NR	3D NR
<b>Image</b>	
Video Compression	Main stream: H.265+ / H.265/ H.264+ / H.264 Sub stream: H.265+ / H.265/ H.264+ / H.264/ MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Stream and Frame Rate	<p>Mode1: Fisheye  Fisheye view (main stream): 3000×3000/2160×2160/1080×1080 (50Hz: 1~25fps; 60Hz: 1~30fps)  Fisheye view (sub stream): 1440×1440/720×720/480×480 (50Hz: 1~25fps; 60Hz: 1~30fps)  Fisheye view (third stream): 960×960/ 640×640/360×360(50Hz: 1~25fps; 60Hz: 1~30fps)</p> <p>Mode2: Panoramic  Panoramic view (main stream): 4000×3000/3000×3000/3840×2160/3200×1800/2560×1440 (50Hz:1~20fps; 60Hz:1~20fps)  Panoramic view (sub stream): 1920×1080/ 960×540/540×540/640×480 (50Hz:1~20fps; 60Hz:1~20fps)  Panoramic view (third stream): 1280×720/640×360/480×480 (50Hz:1~20fps; 60Hz:1~20fps)</p> <p>Mode 3: Fisheye+Panoramic+3 PTZ  Fisheye view (main stream): 3000×3000/2160×2160/1080×1080 (50Hz: 1~15fps; 60Hz:1~15fps)  Fisheye view (sub stream): 1440×1440/720×720/480×480 (50Hz: 1~15fps; 60Hz:1~15fps)  Fisheye view (third stream): 960×960/ 640×640/360×360 (50Hz: 1~15fps; 60Hz:1~15fps)  Panoramic view (main stream): 4000×3000/3000×3000/3840×2160/3200×1800/2560×1440 (50Hz:1~15fps; 60Hz: 1~15fps)  Panoramic view (sub stream): 960×540/540×540/640×480 (50Hz:1~15fps; 60Hz: 1~15fps)  Panoramic view (third stream): 640×360/480×480 (50Hz:1~15fps; 60Hz: 1~15fps)  3PTZ view (main stream): (1280×720/960×540/640×360) * 3 (50Hz:1~15fps; 60Hz: 1~15fps)  3PTZ view (sub stream): (640×360) * 3 (50Hz:1~15fps; 60Hz: 1~15fps)  3PTZ view (third stream): (640×360) * 3 (50Hz:1~15fps; 60Hz: 1~15fps)</p> <p>Mode 4: Fisheye+ 4 PTZ  Fisheye view (main stream): 3000×3000/2160×2160/1080×1080 (50Hz: 1~25fps; 60Hz:1~30fps)  Fisheye view (sub stream): 1080×1080/720×720/480×480 (50Hz: 1~25fps; 60Hz:1~30fps)  Fisheye view (third stream): 960×960/ 640×640/360×360 (50Hz: 1~25fps; 60Hz:1~30fps)  4PTZ view(main stream): (1280×720/960×540/640×360) * 4 (50Hz:1~15fps; 60Hz: 1~15fps)  4PTZ view (sub stream): (640×360) *4 (50Hz:1~15fps; 60Hz: 1~15fps)  4PTZ view (third stream): (640×360) *4 (50Hz:1~15fps; 60Hz: 1~15fps)</p>


	<p>Mode5: Fisheye+ 4 PTZ Fusion</p> <p>Fisheye view (main stream): 3000×3000/2160×2160/1080×1080 (50Hz: 1~25fps; 60Hz:1~30fps)</p> <p>Fisheye view (sub stream): 1440×1440/720×720/480×480 (50Hz: 1~25fps; 60Hz:1~30fps)</p> <p>Fisheye view (third stream): 960×960/ 640×640/360×360 (50Hz: 1~25fps; 60Hz:1~30fps)</p> <p>4PTZ fusion view (main stream): 2560×1440 (50Hz:1~20fps; 60Hz: 1~20fps)</p> <p>4PTZ fusion view (sub stream): 640×360 (50Hz:1~20fps; 60Hz: 1~20fps)</p> <p>4PTZ fusion view (third stream): 640×360 (50Hz:1~20fps; 60Hz: 1~20fps)</p>
Bit Rate	64Kbps ~ 16Mbps
Bit Rate Type	VBR/CBR
Audio Compression	G711A / U
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Flip, Image Mirror, NR, etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately
<b>Interfaces</b>	
Network	1 CH RJ45 10 M/100 M self-adaptive Ethernet port
Video Output	CVBS (BNC × 1)
Audio	2CH Built-in MIC, 1 CH audio input, 1CH audio output
RS-485	Yes, half-duplex
Storage	Built-in micro SD card slot, up to 256GB
Reset	Yes
Alarm	1CH alarm input, 1CH alarm output
<b>Functions</b>	
Remote Monitoring	Web Browser/TVT NVMS2.0/NVR/mobile APP
Web Browser	Chrome 105.0+/Edge 105.0+/Firefox 121.0+/Safari 14.0+
Online Connection	Support simultaneous monitoring for up to 6 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, RTMP, SNMP, PPPoE, DDNS, 802.1x, SMTP, FTP, UPnP, HTTPS, HTTP, QoS, NAT, HTTP POST
Interface Protocol	ONVIF Profile S/G/M
Intelligent Analytics	<p>Mode 1/3/4/5 (ceiling mounting): (Human) region intrusion/region entrance/region exiting/line crossing/target counting by line, heat map</p> <p>Mode 2/3 (Wall mounting or desktop): Region intrusion/region entrance/region exiting/line crossing/target counting by line (human/motor vehicle/non-motor vehicle classification)</p>
Smart Alarm	Motion detection, sensor alarm, SD card error, SD card full, IP address conflict, cable disconnection, audio alarm, audio exception
General function	Watermark, video mask, heartbeat, corridor pattern, fisheye dewarping, system backup, disarming, cloud upgrade, ANR
Security	Video encryption, firmware encryption, HTTPS encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/RTSP/API services
PoE	Yes, IEEE802.3af
IR Distance	10-20m
Ingress Protection	IP67
<b>General</b>	
Power Supply	DC12V/PoE
Power Consumption	<10.5W
Working Environment	-30°C to 60 °C (-22 F to 140 F). Humidity 95% or less (non-condensing)
Storage Environment	-30°C to 65 °C (-22 F to 149 F). Humidity 95% or less (non-condensing)
Dimensions(mm)	Φ130.6×46.3
Weight (net)	Approx. 516.2g
Material	Metal+Plastic

Installation	Wall mounting, ceiling mounting, desktop
Certificate	CE, FCC, UKCA
Environment Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU), directive 94/62/EC and REACH(EC1907/2006)

### Available Model

Available Model	TD-95A8E3B(D/PE/AR1)
-----------------	----------------------

### Available Model

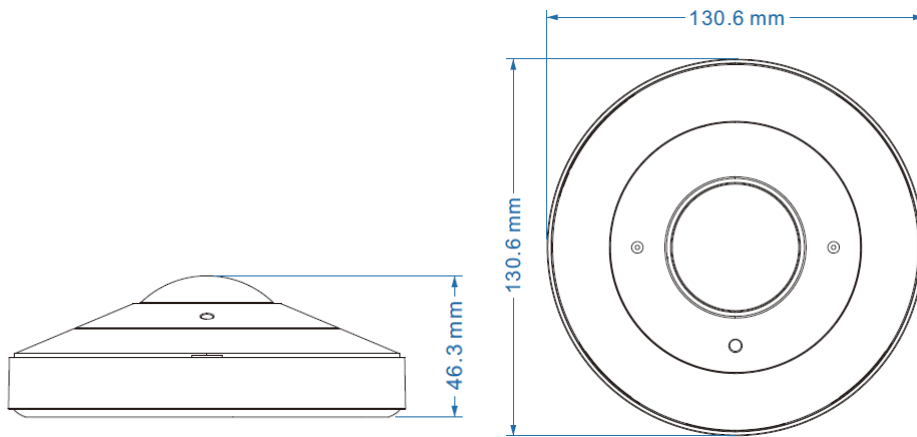

### Available Accessories



YXH0206

YZJ0813

YZJ0409

YZJ0216